
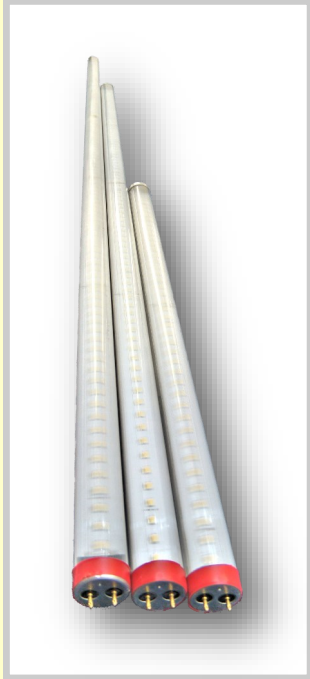


LED TUBELIGHT

NUVI 4000 Series

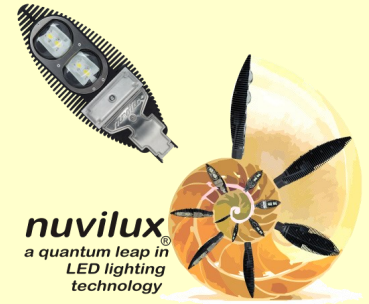


SPECIFICATIONS	DATA		
	MIN.V	TYP.V	MAX.V
PRODUCT CODE	600mm Range		
INPUT VOLTAGE	185V	230V	265V
INPUT CURRENT	62mA	54mA	52mA
OUTPUT CURRENT	130mA	130mA	130mA
POWER FACTOR	0.939	0.927	0.918
OUTPUT POWER (VA)	8.4W		
POWER DISSIPATION	10.4W	10.3W	11.3W
OUTPUT POWER (VA)	11.5W	12.4W	13.8W
EFFICIENCY	87%		
LIGHT SOURCE	STW LED		
COLOUR TEMPERATURE	See Product List		
COLOUR RENDERING			
PEAK WAVE LENGTH			
LUMINOUS INTENSITY	UP TO 988Lm		
CANDELA			
PROTECTION AVAILABLE			
COMPLY TO SPECIFICATION			
OPERATING TEMPERATURE	°C	°C	°C
STORAGE TEMPERATURE	°C	°C	°C
DIMENSIONS (mm)	x	x	
WEIGHT	220g		

PART NUMBER	DESCRIPTION
NUVI.4001.230A.600.102.3Ko	TUBELIGHT - 230Vac 600mm 1000Lm 3000K
NUVI.4001.230A.600.112.4Ko	TUBELIGHT - 230Vac 600mm 1100Lm 4000K
NUVI.4001.230A.600.122.5Ko	TUBELIGHT - 230Vac 600mm 1200Lm 5000K

LED TUBELIGHT

NUVI 4000 Series

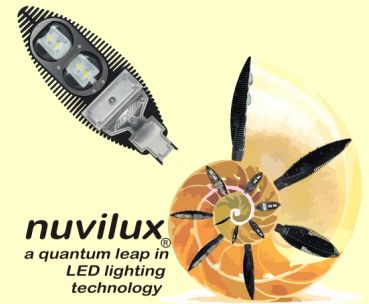

SPECIFICATIONS	DATA		
	MIN.V	TYP.V	MAX.V
PRODUCT CODE	1200mm Range		
INPUT VOLTAGE	185V	230V	265V
INPUT CURRENT	109mA	91mA	84mA
OUTPUT CURRENT	240mA	240mA	240mA
POWER FACTOR	0.933	0.925	0.92
OUTPUT POWER (VA)	17W		
POWER DISSIPATION	17.8W	18.4W	19W
OUTPUT POWER (VA)	20.2W	20.9W	22.3W
EFFICIENCY	87%		
LIGHT SOURCE	STW LED		
COLOUR TEMPERATURE	See Product List		
COLOUR RENDERING			
PEAK WAVE LENGTH			
LUMINOUS INTENSITY	UP TO 1976Lm		
CANDELA			
PROTECTION AVAILABLE			
COMPLY TO SPECIFICATION			
OPERATING TEMPERATURE	°C	°C	°C
STORAGE TEMPERATURE	°C	°C	°C
DIMENSIONS (mm)	x	x	
WEIGHT	420g		

PART NUMBER	DESCRIPTION
NUVI.4001.230A.1200.202.3Ko	TUBELIGHT - 230Vac 1200mm 2000Lm 3000K
NUVI.4001.230A.1200.212.4Ko	TUBELIGHT - 230Vac 1200mm 2100Lm 4000K
NUVI.4001.230A.1200.212.5Ko	TUBELIGHT - 230Vac 1200mm 2100Lm 5000K

LED TUBELIGHT

NUVI 4000 Series



SPECIFICATIONS	DATA		
	MIN.V	TYP.V	MAX.V
PRODUCT CODE	1500mm Range		
INPUT VOLTAGE	185V	230V	265V
INPUT CURRENT	133mA	112mA	106mA
OUTPUT CURRENT	300mA	300mA	300mA
POWER FACTOR	0.935	0.927	0.92
OUTPUT POWER (VA)	21W		
POWER DISSIPATION	21.6W	22W	23.8W
OUTPUT POWER (VA)	24.6W	25.7W	28.1W
EFFICIENCY	95%		
LIGHT SOURCE	STW LED		
COLOUR TEMPERATURE	See Product List		
COLOUR RENDERING			
PEAK WAVE LENGTH			
LUMINOUS INTENSITY	UP TO 2470Lm		
CANDELA			
PROTECTION AVAILABLE			
COMPLY TO SPECIFICATION			
OPERATING TEMPERATURE	°C	°C	°C
STORAGE TEMPERATURE	°C	°C	°C
DIMENSIONS (mm)	x	x	
WEIGHT	520g		

PART NUMBER	DESCRIPTION
NUVI.4001.230A.1500.242.3Ko	TUBELIGHT - 230Vac 1500mm 2400Lm 3000K
NUVI.4001.230A.1500.262.4Ko	TUBELIGHT - 230Vac 1500mm 2600Lm 4000K
NUVI.4001.230A.1500.272.5Ko	TUBELIGHT - 230Vac 1500mm 2700Lm 5000K