


LED STREET LIGHT

NUVI 5000 Series

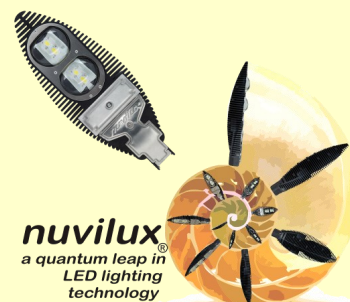

SPECIFICATIONS	DATA		
	MIN.V	TYP.V	MAX.V
PRODUCT CODE	See List		
INPUT VOLTAGE	185V	230V	265V
INPUT CURRENT	252mA	204mA	180mA
OUTPUT CURRENT	1.12A	1.12A	1.12A
POWER FACTOR	0.984	0.975	0.963
OUTPUT POWER (VA)	40.3W		
POWER (MEASURED)	45.8W	46W	45.8W
INPUT POWER (VA)	46.5W	47W	47.6W
EFFICIENCY	88%		
LIGHT SOURCE	LED		
COLOUR TEMPERATURE	See Product List		
COLOUR RENDERING	80		
LUMINEOUS EFFICACY	84Lm/W		
LUMINOUS INTENSITY	See Product List		
CANDELA	-		
PROTECTION AVAILABLE	EMI, OVER VOLTAGE		
COMPLY TO SPECIFICATION			
OPERATING TEMPERATURE	-35°C	°C	+65°C
STORAGE TEMPERATURE	-35°C	°C	+70°C
DIMENSIONS (mm)	517x	192x	100
WEIGHT	5.2Kg		

PART NUMBER	DESCRIPTION
NUVI.5001.230A.0.542.4K0	STREETLIGHT - 230Vac 5400Lm 4000K incl D/N
NUVI.5002.230A.0.542.4K0	STREETLIGHT - 230Vac 5400Lm 4000K
NUVI.5001.230A.0.502.2K7	STREETLIGHT - 230Vac 5000Lm 2700K incl D/N
NUVI.5002.230A.0.502.2K7	STREETLIGHT - 230Vac 5000Lm 2700K
NUVI.5001.230A.0.522.3K0	STREETLIGHT - 230Vac 5200Lm 3000K incl D/N
NUVI.5002.230A.0.522.3K0	STREETLIGHT - 230Vac 5200Lm 3000K